

REV	DESCRIPTION	DRW.	DATE
01.1	初版发行	G.X.Y	2025.06.25

Notes/备注:

1. Electrical properties/电气特性

UL Standard/UL 标准

Use Group/应用组别	B	C	D
Rated Voltage/额定电压 (V)	150	/	/
Rated Current/额定电流 (A)	5	/	/
Withstanding voltage/工频耐压	AC 1300V/1Min		

IEC Standard/IEC 标准

Rated Voltage/额定电压 (V): 320

Rated Current/额定电流 (A): 6

Overvoltage Category/过电压类别 /Pollution Degree/污染等级	II/2	III/2	III/3
Voltage/电压 (V)	320	160	160
Rated Impulse Voltage/冲击耐压(KV)	2.5	2.5	2.5





2. Environmental safety/环境安全

Operating temperature/工作温度范围(℃): -40~+105

RoHS compliant/符合RoHS环保要求

料号	颜色	1/棕	2/红	3/橙	4/黄	5/绿	6/蓝	7/紫	8/灰	9/白	A/黑
L045P070XX											A001

2	F8NV-2.54-焊针		TZ00077100		N	Brass	Sn Plated	
1	F8NRM-2.54-XXP-主体		L045P070XX		1	PA66-GF25	UL94 V-0	
ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL	NOTES	
APP. M.X.B		DATE: 2025.06.25	PART NO: F8NVT-2.54-XXP-X					
CHK. M.C.N		DATE: 2025.06.25						
DRW. G.X.Y		DATE: 2025.06.25	DARWING TYPE: Production Drawing					
PROJECTION					UNITS: mm		SCALE: 4:1	SHEET/OF: 1/1
AINEWELL					苏州凯若思电子有限公司 SUZHOU CANRENS ELECTRONICS CO.,LTD			

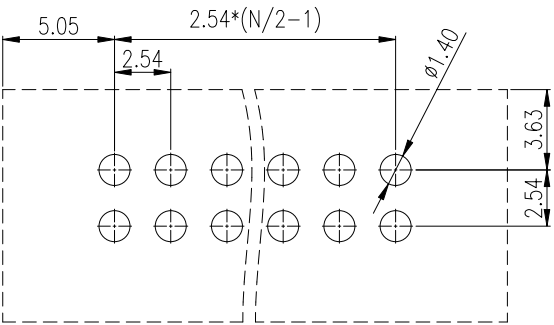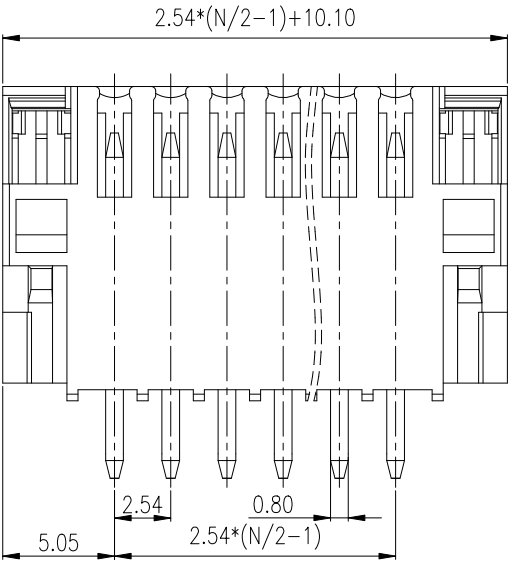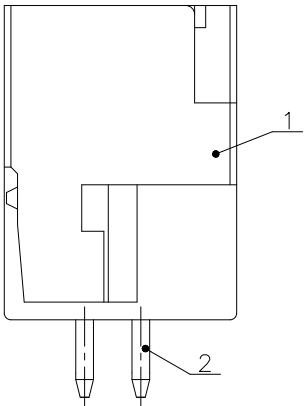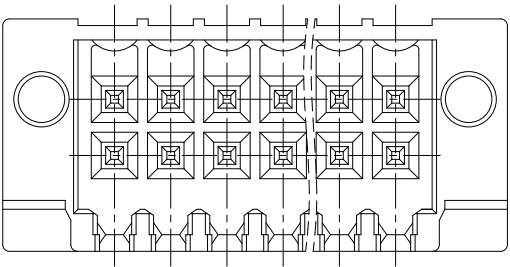

PCB LAYOUT

Nominal dimension Tolerances (mm)								≡	⊥	—	//
0 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 180	over 180 to 250	over 250 to 320	all	all	all	all
0.2	+0.25	+0.3	+0.4	+0.5	+0.65	+0.8	+1	+1.5	0.3	0.3	0.3