


REV	DESCRIPTION	DRW.	DATE
00.1	新品发行	MCN	2023.08.04

Notes/备注:

1. Electrical properties/电气特性
UL Standard/UL标准
Rated Voltage/额定电压(V): 250
Rated Current/额定电流(A): 5
IEC Standard/IEC标准
Rated Voltage/额定电压(V): 160
Rated Current/额定电流(A): 5
Rated Impulse Voltage/冲击耐压(KV): 1.5
2. Environmental safety/环境安全
Operating temperature/工作温度范围(°C): -40~+120
RoHS compliant/符合RoHS环保要求

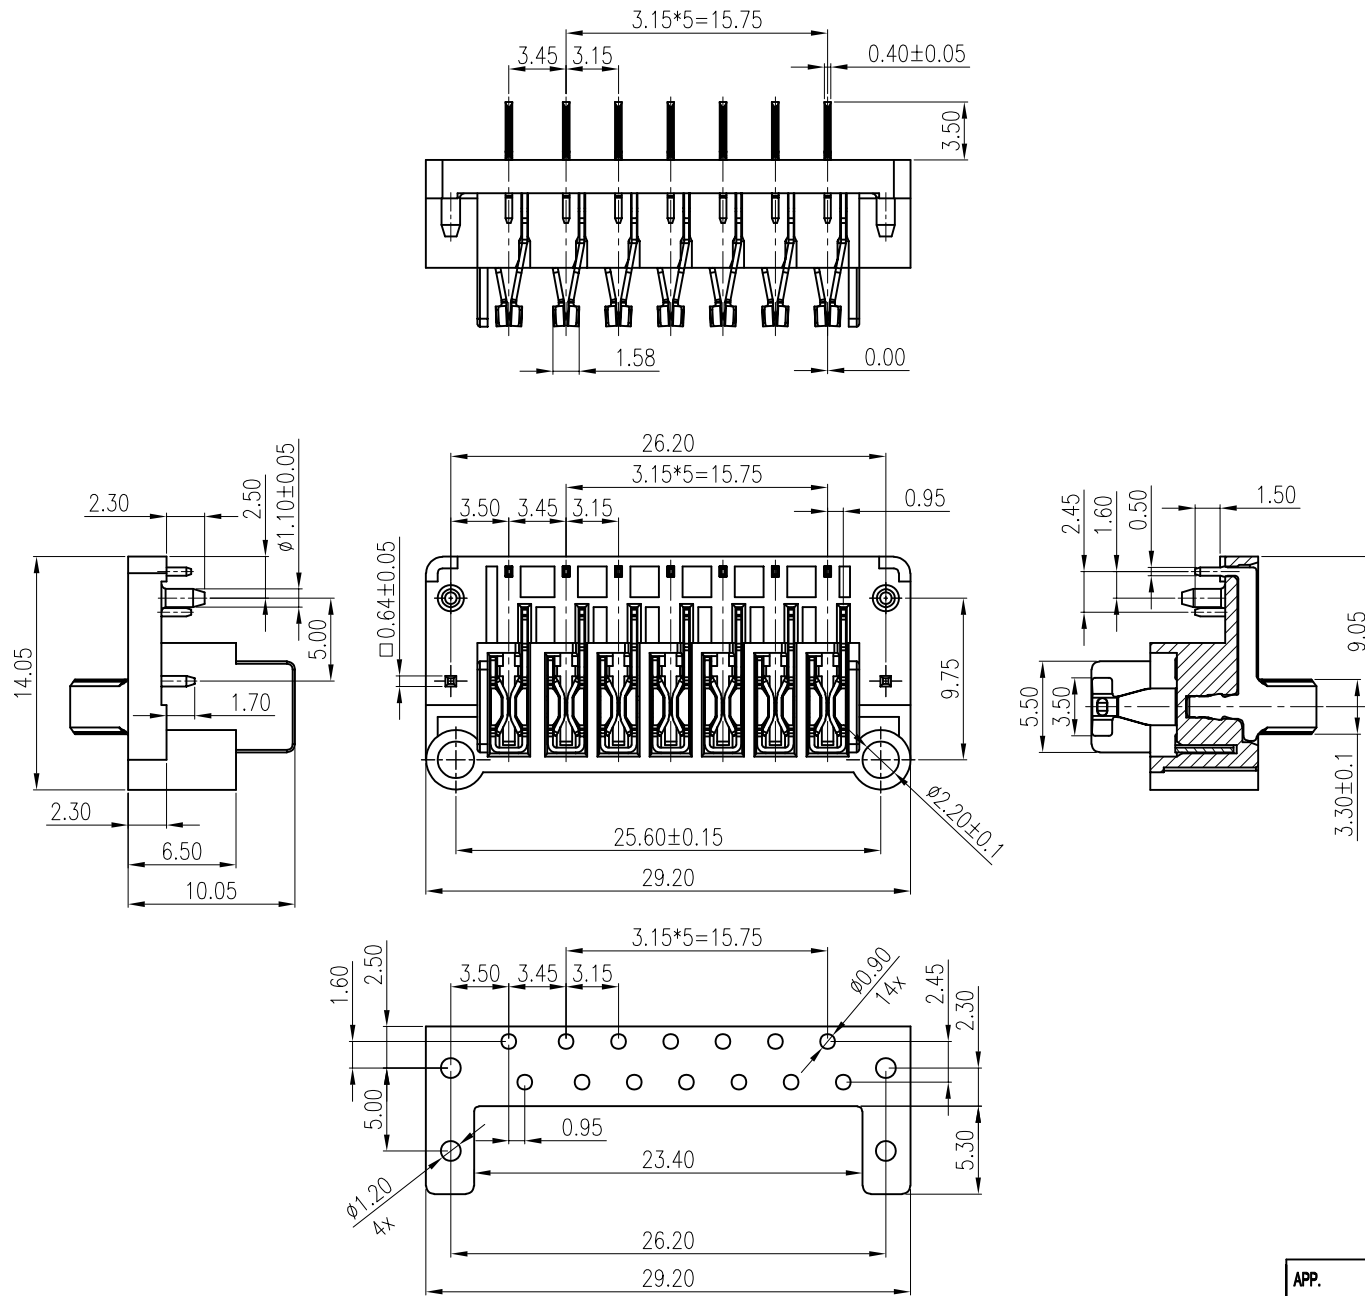

Nominal dimension Tolerances (mm)							
0 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 180	over 180 to 250	over 250 to 320
±0.25	±0.3	±0.35	±0.5	±0.7	±0.9	±1.0	±1.2

PCB Layout

4	SURPORT PIN 固定针	Copper Alloy	Sn Plated
3	PIN 插片	Copper Alloy	Au Plated
2	CLAMP 夹片	Copper Alloy	Au Plated
1	HOUSING 主体	LCP	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

APP.	DATE:	PART NO.: AF101-01-07P-A			
CHK.	DATE:				
DRW. MCN	DATE: 2023.08.04	DARWING TYPE: Customer Drawing			
PROJECTION			UNITS: mm	SCALE: 3:1	SHEET/OF: 1/1
 昆山艾尼维尔电子有限公司 KUN SHAN AINEWELL ELECTRONICS CO.,LTD					