


REV	DESCRIPTION	DRW.	DATE
00	初版发行	M.C.N	2025.02.14

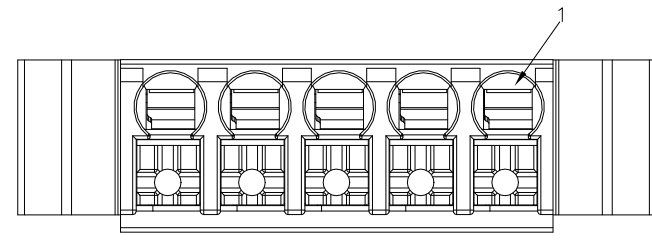




Notes/备注:
1. Electrical properties/电气特性
UL Standard/UL标准

Use Group/应用组别	B	C	D
Rated Voltage/额定电压 (V)	300	/	300
Rated Current/额定电流 (A)	8	/	8
Withstanding voltage/工频耐电压	AC 1600V/1Min		

IEC Standard/IEC标准
Rated Voltage/额定电压 (V): 320
Rated Current/额定电流 (A): 8

Overvoltage Category/过电压类别 /Pollution Degree/污染等级	II/2	III/2	III/3
Voltage/电压 (V)	320	160	160
Rated Impulse Voltage/冲击耐电压(KV)	2.5	2.5	2.5

2. Connection data/连接数据
Wire range/线径范围(AWG/mm²): 24~16/0.2~1.5
Stripping length/剥线长度(mm): 9~10
3. Environmental safety/环境安全
Operating temperature/工作温度范围(°C): -40~+105
RoHS compliant/符合RoHS环保要求

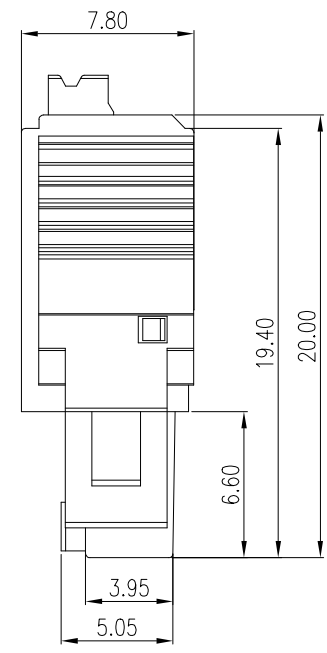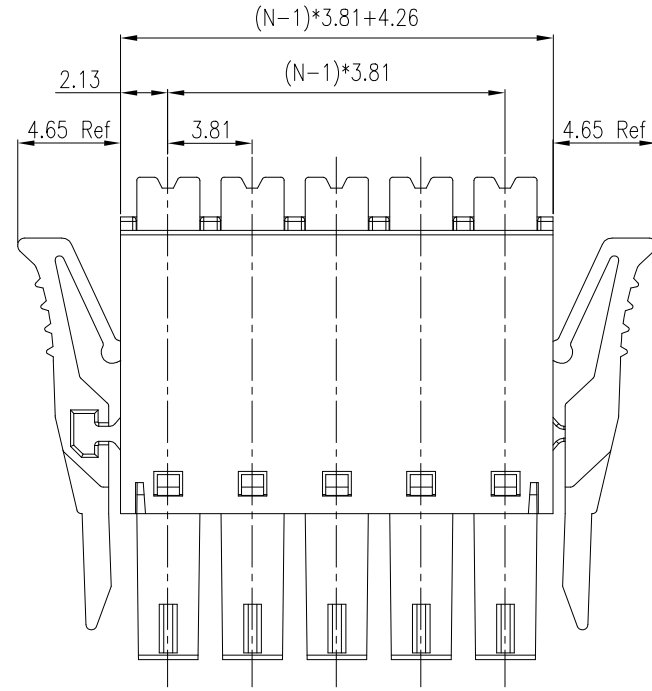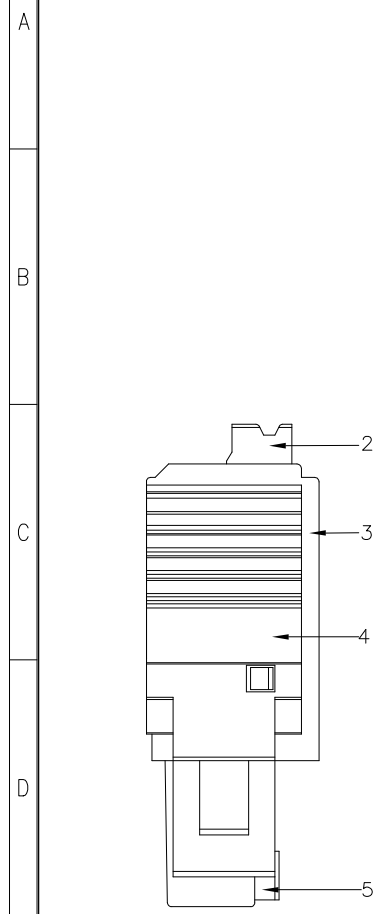

Part No./料号说明:
F7EMG-3.81-XXPL-X-100

Nominal dimension		Tolerances (mm)					
0	over 18	over 30	over 50	over 80	over 120	over 180	over 250
to 18	to 30	to 50	to 80	to 120	to 180	to 250	to 320
	±0.25	±0.3	±0.35	±0.5	±0.7	±0.9	±1.2

- Poles/P数
02: 2Poles
03: 3Poles
...
24: 24Poles
- Color/颜色
1: Brown/棕色
2: Red/红色
3: Orange/橙色
4: Yellow/黄色
5: Green/绿色
6: Blue/蓝色
7: Purple/紫色
8: Grey/灰色
9: White/白色
A: Black/黑色

5	COVER 盖板	PA66	UL94 V-0
4	HANDLE 把手	PA66	/
3	HOUSING 主体	PA66	UL94 V-0
2	BUTTON 按钮	POM	
1	CLAMP 夹片	Copper Alloy	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES

APP. M.X.B	DATE: 2025.02.14	PART NO.: F7EMG-3.81-XXPL-X-100	
CHK. C.W	DATE: 2025.02.14		
DRW. M.C.N	DATE: 2025.02.14	DARWING TYPE: Customer Drawing	
PROJECTION		UNITS: mm	SCALE: 4:1 SHEET/OF: 1/1
		昆山艾尼维尔电子有限公司 KUN SHAN AINEWELL ELECTRONICS CO.,LTD	