

REV	DESCRIPTION	DRW.	DATE
00	初版发行	M.C.N	2022.06.06



Notes/备注:
1. Electrical properties/电气特性
UL Standard/UL 标准

Use Group/应用组别	B	C	D
Rated Voltage/额定电压 (V)	300	/	300
Rated Current/额定电流 (A)	15	/	10
Withstanding voltage/工频耐电压	AC 1600V/1min		

IEC Standard/IEC标准
Rated Voltage/额定电压 (V): 320
Rated Current/额定电流 (A): 16

Overvoltage Category/过电压类别 /Pollution Degree/污染等级	II/2	III/2	III/3
Voltage/电压 (V)	630	320	250
Rated Impulse Voltage/冲击耐电压(KV)	4	4	4

2. Connection data/连接数据
Wire range/线径范围(AWG/mm²): 28~12/0.2~2.5
Stripping length/剥线长度(mm): 7~8
Wire tightening torque/锁线扭矩(N.m): 0.5~0.6
3. Environmental safety/环境安全
Operating temperature/工作温度范围(°C): -40~+105
RoHS compliant/符合RoHS环保要求

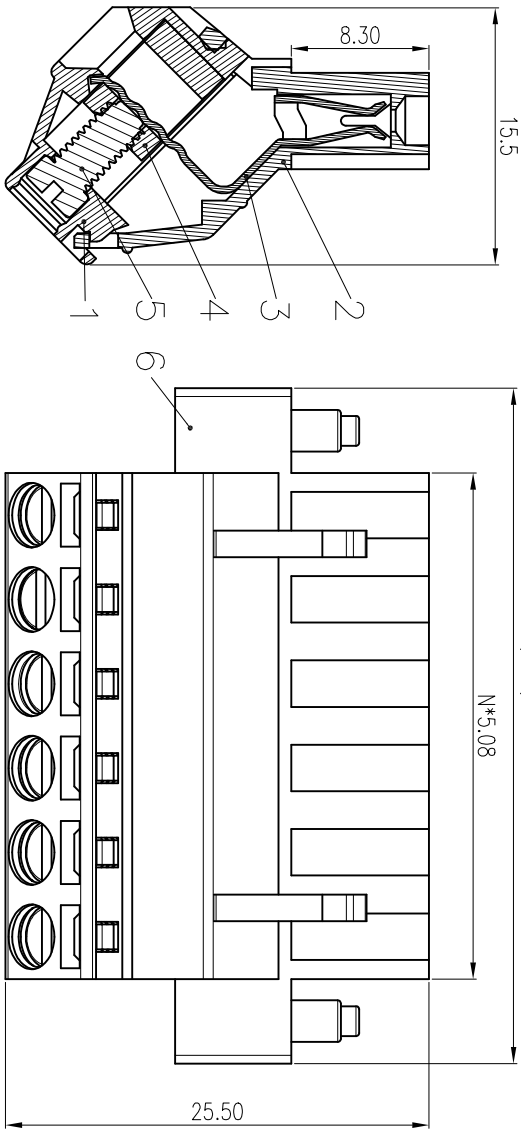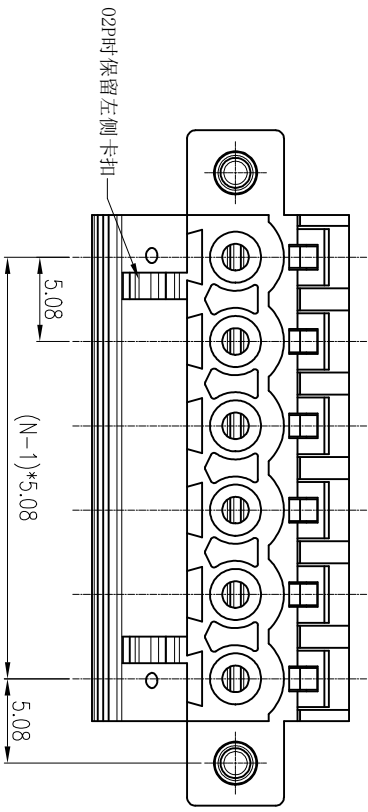

Part No./料号说明:
F6AFM-5.08-XXP-1-X

Nominal dimension Tolerances (mm)

	over 0 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 180	over 180 to 250	over 250 to 320
	±0.25	±0.3	±0.35	±0.5	±0.7	±0.9	±1.0	±1.2

Poles/极数

02: 2Poles
03: 3Poles
..: 24Poles

Color/颜色

1: Brown/棕色
2: Red/红色
3: Orange/橙色
4: Yellow/黄色
5: Green/绿色
6: Blue/蓝色
7: Purple/紫色
8: Grey/灰色
9: White/白色
A: Black/黑色

APP. M.X.B DATE: 2022.06.06

CHK. C.W DATE: 2022.06.06

DRW. M.C.M DATE: 2022.06.06

PART NO.: F6AFM-5.08-XXP-1-X

DRAWING TYPE: Customer Drawing

PROJECTION	UNITS: mm	SCALE: 3:1	SHEET/OF: 1/1
------------	-----------	------------	---------------

ANINWELL

昆山艾尼维尔电子有限公司
KUN SHAN ANINWELL ELECTRONICS CO.,LTD