
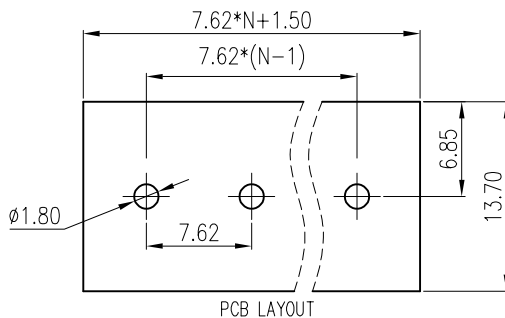

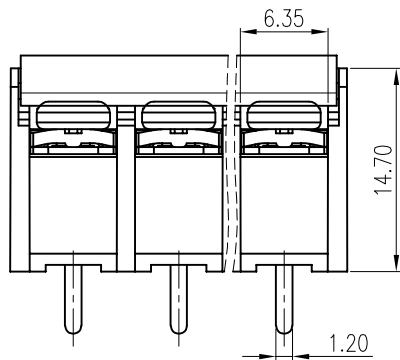



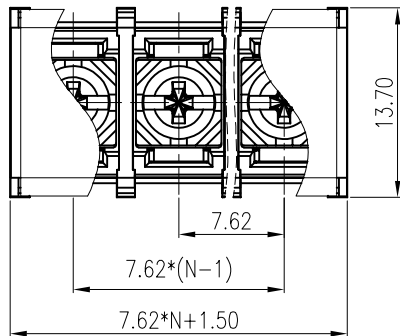

Nominal dimension Tolerances (mm)								∠	≡	⊥	—	//
0 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 180	over 180 to 250	over 250 to 320	all	all	all	over 0 to 100	over 100 to 150
±0.2	±0.25	±0.3	±0.4	±0.5	±0.65	±0.8	±1	±1.5	0.3	0.3	0.3	0.4

REV	DESCRIPTION	DRW.	DATE
00.1	初版发行	C.W	2022.06.28

Notes/备注:

1. Electrical properties/电气特性
UL Standard/UL 标准

Use Group/应用组别	B	C	D
Rated Voltage/额定电压 (V)	300	/	300
Rated Current/额定电流 (A)	15	/	10
Withstanding voltage/工频耐电压	AC 1600V/1Min		

IEC Standard/IEC 标准

Rated Voltage/额定电压 (V): 320

Rated Current/额定电流 (A): 24

Overvoltage Category/过电压类别 /Pollution Degree/污染等级	II/2	III/2	III/3
Voltage/电压 (V)	400	320	250
Rated Impulse Voltage/冲击耐电压(KV)	4	4	4

2. Connection data/连接数据

Wire range/线径范围(AWG/mm²): 22~14/0.2~2.5

Stripping length/剥线长度(mm): 7~8

Wire tightening torque/导线扭矩(N.m): 0.6~0.8

3. Environmental safety/环境安全

Operating temperature/工作温度范围(°C): -40~+105

RoHS compliant/符合RoHS环保要求

料号	颜色	1/棕	2/红	3/橙	4/黄	5/绿	6/蓝	7/紫	8/灰	9/白	A/黑
L008P010XX											A001
L008P050XX											T001

4	F-25R-7.62-XXP-透明盖板	L008P050XX	1	PC	UL94 V-2
3	F-25C-7.62-端子	L008M01100	N	C2680-H/2	Sn Plated
2	F-25C-7.62-端子螺丝(一十字)	TS00009420	N	1022	M3/Zn Plated
1	F-25C-7.62-XXP-主体	L008P010XX	1	PA66+GF15	UL94 V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES

APP.	DATE:	F-25C-7.62-XXP-C			
CHK.	DATE:				
DRW. C.W	DATE: 2022.06.28	DARWING TYPE: Production Drawing			
PROJECTION			UNITS: mm	SCALE: 2.5:1	SHEET/OF: 1/1
 苏州凯若思电子有限公司 SUZHOU CANRENS ELECTRONICS CO.,LTD					