

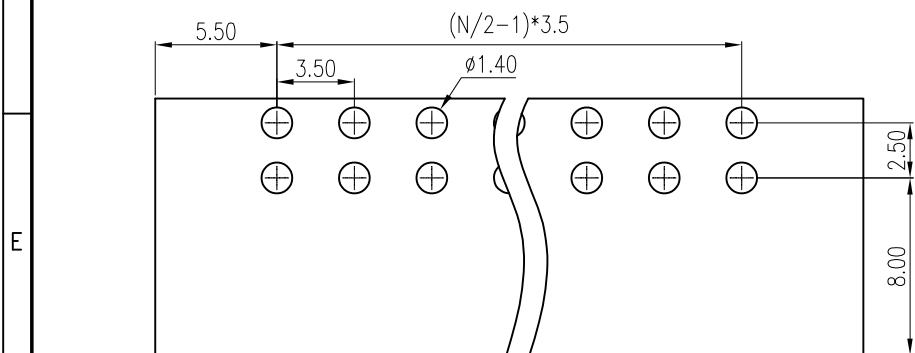
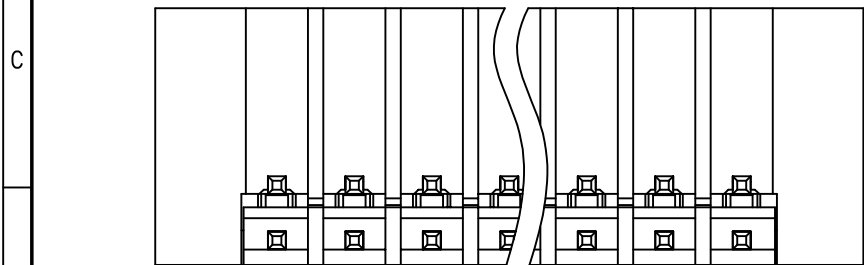
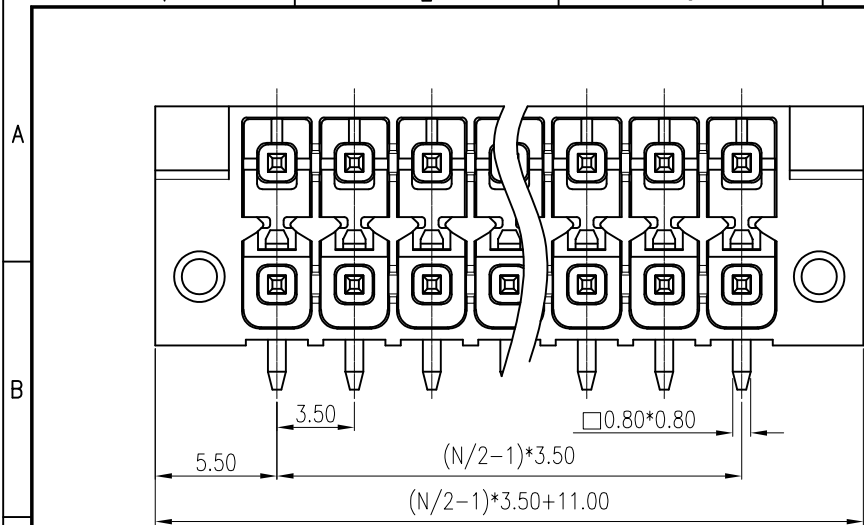




PCB LAYOUT

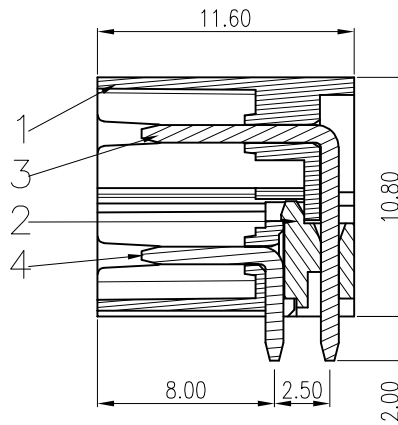

REV	DESCRIPTION	DRW.	DATE
00	初版发行	M.C.N	2022.10.14

Notes/备注:

1. Electrical properties/电气特性

UL Standard/UL标准

Use Group/应用组别	B	C	D
Rated Voltage/额定电压 (V)	150	/	300
Rated Current/额定电流 (A)	8	/	8
Withstanding voltage/工频耐电压	AC 1600V/1Min		

IEC Standard/IEC标准

Rated Voltage/额定电压 (V): 160

Rated Current/额定电流 (A): 8

Overvoltage Category/过电压类别 /Pollution Degree/污染等级	II/2	III/2	III/3
Voltage/电压 (V)	250	160	160
Rated Impulse Voltage/冲击耐电压 (KV)	2.5	2.5	2.5

2. Environmental safety/环境安全

Operating temperature/工作温度范围(℃): -40~+105

RoHS compliant/符合RoHS环保要求

Part No./料号说明:

F8CRT-THR-3.5-XXP-X

Poles/P数

04: 4Poles

05: 5Poles

... 48: 48Poles

A: Black/黑色

4	PIN HEADER 焊针	COPPER	Sn Plated
3	PIN HEADER 焊针	COPPER	Sn Plated
2	COVER 盖板	LCP	UL94 V-0
1	HOUSING 主体	LCP	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

APP.	DATE:	PART NO:	
CHK.	DATE:	F8CRT-THR-3.5-XXP-X	
DRW. M.C.N	DATE: 2022.10.14	DARWING TYPE: Customer Drawing	
PROJECTION		UNITS: mm	SCALE: 4:1 SHEET/OF: 1/1
AINEWELL 昆山艾尼维尔电子有限公司 KUN SHAN AINEWELL ELECTRONICS CO.,LTD			