
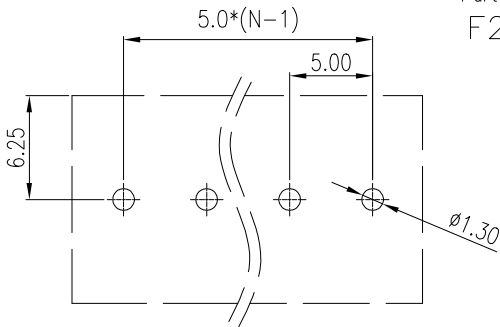
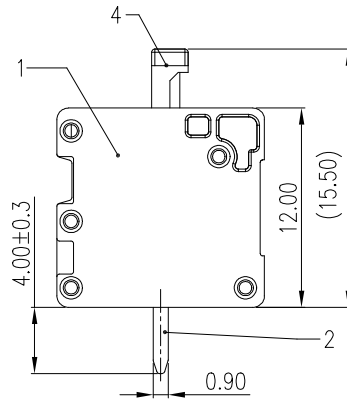
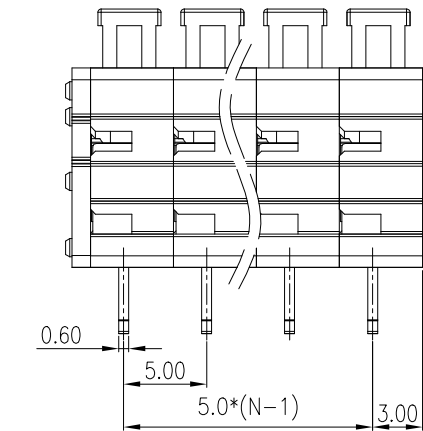


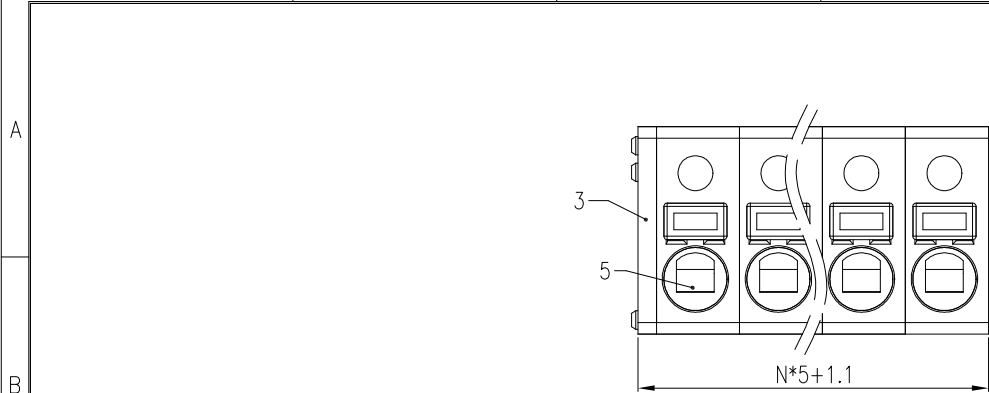

Part No./料号说明:

F246V-5.0-XXP-SCX

Poles/P数
02: 2Poles
03: 3Poles
...
24: 24Poles

Color/颜色

1: Brown/棕色 6: Blue/蓝色
2: Red/红色 7: Purple/紫色
3: Orange/橙色 8: Grey/灰色
4: Yellow/黄色 9: White/白色
5: Green/绿色 A: Black/黑色

Notes/备注:

1. Electrical properties/电气特性

UL Standard/UL 标准

Use Group/应用组别	B	C	D
Rated Voltage/额定电压 (V)	300	/	300
Rated Current/额定电流 (A)	8	/	8
Withstanding voltage/工频耐电压	AC 1600V/1Min		

IEC Standard/IEC 标准

Rated Voltage/额定电压 (V): 320

Rated Current/额定电流 (A): 15

Overvoltage Category/过电压类别 /Pollution Degree/污染等级	II/2	III/2	III/3
Voltage/电压 (V)	630	320	250
Rated Impulse Voltage/冲击耐电压 (KV)	4	4	4

2. Connection data/连接数据

Wire range/线径范围 (AWG/mm²): 24~16/0.2~1.5

Stripping length/剥线长度 (mm): 8~9

3. Environmental safety/环境安全

Operating temperature/工作温度范围 (°C): -40~+105

RoHS compliant/符合RoHS环保要求

5	Spring 弹片	Steel	/
4	Button 按钮	PA66	UL94 V-0
3	Cover 盖板	PA66	UL94 V-0
2	PIN HEADER 焊针	Copper Alloy	Sn Plated
1	HOUSING 主体	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

APP.	DATE:	PART NO.: F246V-5.0-XXP-SCX		
CHK.	DATE:			
DRW. T.P.W	DATE: 2024.05.24	DARWING TYPE: Customer Drawing		
PROJECTION		UNITS: mm	SCALE: 3:1	SHEET/OF: 1/1
		昆山艾尼维尔电子有限公司 KUN SHAN AINEWELL ELECTRONICS CO.,LTD		